

TOPAIR CLEAN AIR SOLUTIONS

CATALOG



TOPAIR
CLEAN AIR SOLUTIONS



2015

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA

Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA

European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way,
Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

About TopAir Systems

TopAir Systems is a supplier of superior clean air and containment solutions. TopAir clean air solutions are used in laboratories and manufacturing facilities within chemical/biological plants, universities, research & development facilities and hospitals, as well as in the electronics, semiconductor and pharmaceutical industries. The company's customer base is spread over several continents, with active sales in Europe, North & South America and Africa.

At TopAir, customer satisfaction comes first: The company is characterized by an especially flexible approach and customizes its products in accordance with customer requests, concerning dimensions, technical specifications and accessories. Moreover, TopAir offers a variety of products and models to

accommodate and cover customer needs. Finally, the company does the utmost to develop cost-effective solutions of the highest quality, to ensure customer satisfaction.

Product safety is meticulously heeded: The most stringent guidelines are implemented to ensure the well-being of lab and manufacturing personnel, and significant efforts are invested in attaining relevant certifications.

TopAir has a strong commitment to innovation: It continuously reviews new technologies as they emerge, and invests significant resources in R&D in order to provide customers with the most advanced features in the market.



Polypropylene Ductless Fume Hood

Topair's Polypropylene Ductless Fume Hoods provide an ultimate protective work environment for lab staff working with acids and harsh chemicals.

The electrical and mechanical components are manufactured by leading global companies, such as EBM Germany and AAF USA. The products comply with relevant international standards.

TopAir Polypropylene Ductless Fume Hoods are customized to the requirements of each client.

- Welded white polypropylene structure
- Built-in sealed polypropylene worktop
- Easily dissembled back wall
- Tempered glass sliding front window
- Monitor indicating fan's total working time, for tracking and filter replacement purposes
- Top quality, quiet fan manufactured by EBM Germany
- Eco-friendly, cost-effective 600-800 LUX LED lighting separate from the fuming hall.
- Wind speed at 0.6+0.1 m/s, 120±FPM
- Easy filter replacement
- Top filtration unit including carbon filter
- User-friendly digital control system including fan speed control, and displays for air pressure, signal light, operation time and alarms.



Models

Spec/ Model	CF-060-A-PP	CF-090-A-PP	CF-120-A-PP	CF-160-A-PP	CF-180-A-PP
Outer Dimensions	600 x 700 x 1050 mm 23.62 x 27.5 x 41.3"	900 x 700 x 1050 mm 35.4 x 27.5 x 41.3"	1200 x 700 x 1050 mm 47.24 x 27.5 x 41.3"	1600 x 700 x 1050 mm 62.99 x 27.5 x 41.3"	1800 x 700 x 1050 mm 70.67 x 27.5 x 41.3"
Workspace (W x D x H)	540 x 640 x 660 mm 21.26 x 25.2 x 26"	840 x 640 x 660 mm 33.07 x 25.2 x 26"	1140 x 640 x 660 mm 44.88 x 25.2 x 26"	1540 x 640 x 660 mm 60.63 x 25.2 x 26"	1740 x 640 x 660 mm 66.50 x 25.2 x 26"
Production / Test Standard	EN-14175 / CE / ASHRAE 110-1995				
Air Velocity	0.6±0.1m/s, 120±20 FP				
Cabinet Material	Welded white polypropylene structure with built-in sealed polypropylene worktop				
Noise Level	<52dB	<52dB	<54dB	<60dB	<62dB
	(Tested 20 cm from the work table, 1.2m above ground)				
Power Supply Options	110 / 220V 50/60 Hz, Single phase				
Illumination	>600-800 LUX, Eco-friendly LED lighting				
Filter	Charcoal Filter/ multi-gas filter/HEPA				

Accessories

Spec/ Model	CF-060-A-PP	CF-090-A-PP	CF-120-A-PP	CF-160A-PP	CF-180-A-PP
Stand WxDxH	CF-060-ST 600 x 700 x 850 mm 23.6 x 27.56 x 33.46"	CF-090-ST 900 x 700 x 850 mm 35.43 x 27.56 x 33.46"	CF-120-ST 1200 x 700 x 850 mm 47.24 x 27.56 x 33.46"	CF-160-ST 1600 x 700 x 850 mm 63 x 27.56 x 33.46"	CF-180-ST 1800 x 700 x 850 mm 70.86 x 27.56 x 33.46 "
UV Light	CF-060-UV	CF-090-UV	CF-120-UV	CF-160-UV	CF-180-UV
Separate Table	CF-060-UB	CF-090-UB	CF-120-UB	CF-160-UB	CF-180-UB

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA

Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA

European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way, Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Polypropylene Fume Cabinet

Topair's Polypropylene Fume Cupboards are manufactured from high-quality non-corrosive polypropylene with excellent chemical resistance.

Polypropylene increases the product's tensile strength and improves its thermal characteristics.

The Polypropylene Fume Cupboards protect laboratory staff from noxious fumes released by acids, dangerous gas and organic solutions - materials and acids which regular steel hoods may not withstand.

Harmful and unpleasant chemical fumes are removed from the controlled environment to facilitate a safe, pleasant work environment. The Fume Cupboard channels chemical vapors out of the building using an external fan installed on the roof or on an external wall.

The cupboards are designed for work with heavy chemicals, and have been independently tested to meet the requirements of EN-14175, ASHRAE 110-1995 standards.

- White polypropylene structure featuring high chemical resistance
- One-piece welded structure
- Built-in polypropylene worktop
- Tempered glass slide front sash
- Eco-friendly, cost-effective 800 LUX LED lighting separate from the fuming hall
- Lower base cabinet
- Optional: sink/water tap/gas tap/vacuum tap
- User-friendly digital control system including fan, light and signal light control
- Additional options: VAV system, variety of worktop materials



Models

Spec/Model	FH-120-PP	FH-150-PP	FH-180-PP
External Dimensions	1200 x 850 x 2350 mm	1500 x 850 x 2350 mm	1800 x 850 X 2350 mm
W x D x H	47.3x 33.5 x 92.50"	59.0 x 33.5 x 92.5 "	70.9 x 33.5 x 92.5"
Workspace	1000 x 650 x 1000 mm	1300 x 650 x 1000 mm	1600 x 650 x 1000 mm
(W x D x H)	39.4 x 25.6 x 39.4"	51.2 x 25.6 x 39.4"	63 x 25.6 x 39.4"
Production / test Standard	EN-14175 / ASHRAE 110-1995		
Air Velocity	0.6±0.1m/s, 120 ±20FPM		
Cabinet Material	White Polypropylene		
Work Table Material	HPL/ Ceramic / Epoxy / PP		
Optional Control System	VAV System with 7" color touch screen		
Standard Options	Water tap/ gas tap / vacuum tap/ pp sink		
Power Supply Options	110 / 220V 50/60 Hz, Single/triple phase		
Illumination	>800 LUX LED lights		

Accessories

Spec/Model	FH-120-PP	FH-150-PP	FH-180-PP
Stand	FH-120-PP-ST	FH-150-PP-ST	FH-180-PP
W x D x H	1200 x 850 x 800 mm 47.2 x 33.5 x 31.5"	1500 x 850 x 800 mm 59 x 33.5 x 31.5"	1800 x 850 x 800 mm 70.9 x 33.5 x 31.5"
UV Light	FH-120-UV	FH-150-UV	FH-180-UV
Leg Space Base	FH-120-VB	FH-150-VB	FH-180-VB

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
 Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
 Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA
 European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way,
 Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Active Polypropylene Fume Cabinet

TopAir's Active Polypropylene Fume Cupboard is an advanced, high quality system, offered at highly competitive prices relative to the market.

The unit is manufactured from high-quality non-corrosive polypropylene with excellent chemical resistance. Polypropylene increases the product's tensile strength and improves its thermal characteristics.

The Active Fume Cupboards protect laboratory staff from noxious fumes released by acids, dangerous gas and organic solutions – materials and acids which regular steel hoods may not withstand. Harmful and unpleasant chemical fumes are removed from the controlled environment to facilitate a safe, pleasant work environment. The fume cupboard channels chemical vapors out of the building using an external fan installed on the roof or on an external wall.

The Fume Cupboard features a sensor which detects staff standing next to the unit, and, accordingly, opens and closes the window automatically. The unit's fan speed changes according to the open/closed mode of the window, saving substantial power.


The unit also has an extra system of small fans inside the unit, with a side spray system which improves the airflow inside the unit and the safety of the unit.

VAV System

TopAir's reliable VAV (Variable Air Volume) system for fume cupboards measures the sash line air velocity using a high quality sensor. The data is converted to an analog signal that can control a VFD (Variable-Frequency Drive).

The system's key advantage is its ease of operation: an unskilled worker can easily calibrate, set the alarm and operation set points and control the system. The VAV system provides a safe, energy-saving environment and can upgrade fume cupboards to smart, advanced devices. Topair's VAV system is provided as a complete installed product.

- White polypropylene structure featuring high chemical resistance
- One-piece welded structure
- Built-in polypropylene worktop
- Tempered glass slide front sash
- VAV system including 7" color display screen
- Sensor detects staff presence and opens/closes window, as well as adjusting fan speed to save power
- Eco-friendly, cost-effective 800 LUX LED lighting separated from the fuming hall
- Lower base cabinet
- Optional: sink/water tap/gas tap/vacuum tap
- User-friendly digital control system including fan, light and signal light control

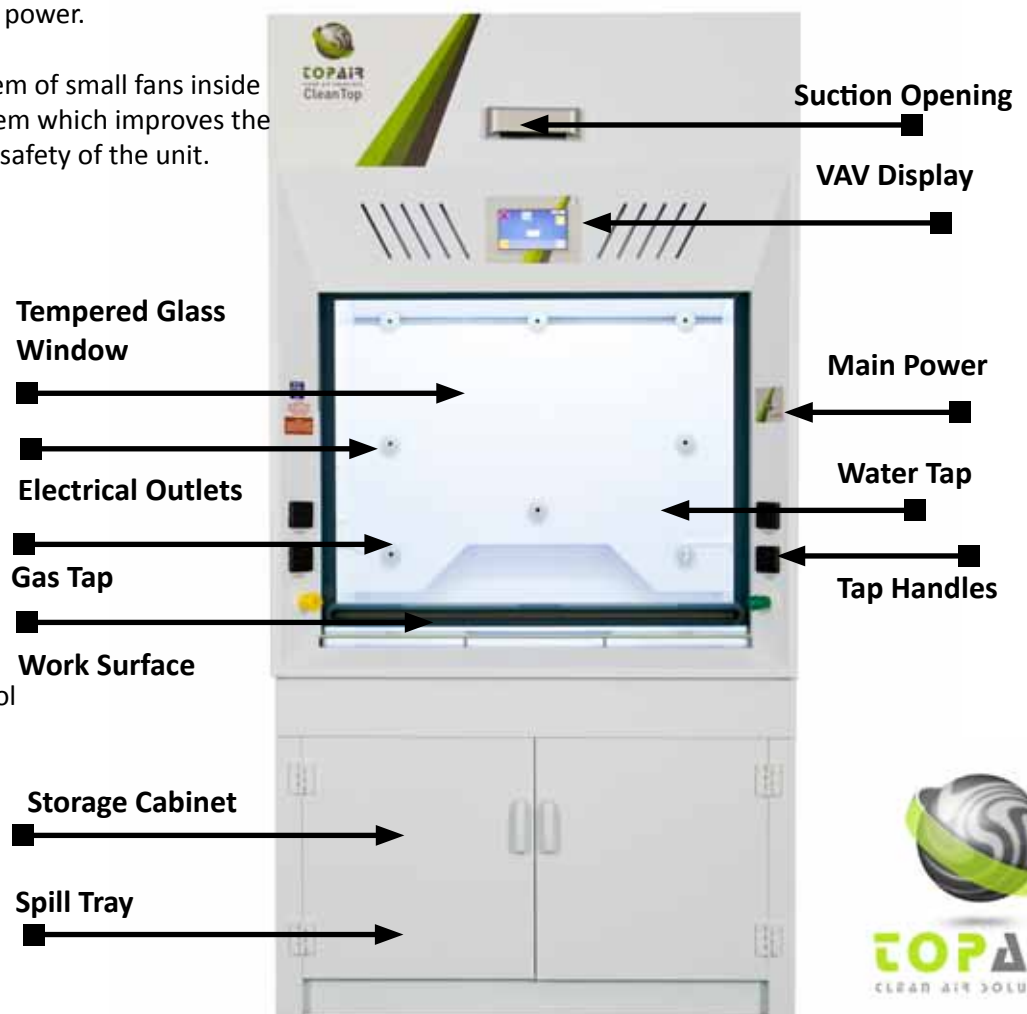

Models

Spec/Model	FH-120-PP-ACT	FH-150-PP-ACT	FH-180-PP-ACT
External Dimensions	1200 x 850 x 2350 mm	1500 x 850 x 2350 mm	1800 x 850 X 2350 mm
W x D x H	47.3x 33.5 x 92.50"	59.0 x 33.5 x 92.5 "	70.9 x 33.5 x 92.5"
Workspace	1000 x 650 x 1000 mm	1300 x 650 x 1000 mm	1600 x 650 x 1000 mm
(W x D x H)	39.4 x 25.6 x 39.4"	51.2 x 25.6 x 39.4"	63 x 25.6 x 39.4"
Production / test Standard	EN-14175 / ASHRAE 110-1995		
Air Velocity	0.6±0.1m/s, 120 ±20FPM		
Cabinet Material	White Polypropylene		
Work Table Material	HPL/ Ceramic / Epoxy / PP		
Control System	VAV system with 7" color touch screen		
Standard Options	Water tap/ gas tap / vacuum tap/ pp sink		
Power Supply Options	110 / 220V 50/60 Hz, Single/triple phase		
Illumination	>800 LUX LED lights		

Accessories

Spec/Model	FH-120-PP-ACT	FH-150-PP-ACT	FH-180-PP-ACT
Stand	FH-120-PP-ST	FH-150-PP-ST	FH-180-PP
W x D x H	1200 x 850 x 800 mm 47.2 x 33.5 x 31.5"	1500 x 850 x 800 mm 59 x 33.5 x 31.5"	1800 x 850 x 800 mm 70.9 x 33.5 x 31.5"
UV Light	FH-120-UV	FH-150-UV	FH-180-UV
Leg Space Base	FH-120-VB	FH-150-VB	FH-180-VB

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
 Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
 Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA
 European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way,
 Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Metal Fume Cabinet

Metal Fume Cupboards protect laboratory staff from noxious fumes when working with acids, dangerous gas, organic solutions, etc. Harmful and unpleasant chemical fumes are removed from the controlled environment to facilitate a safe, pleasant work environment.

The Fume Cupboard channels chemical vapors out of the building using an internal fan installed on the roof or on an external wall.

The cabinet structure is made of epoxy-covered metal, while the internal structure is made of HPL 6mm.

- Metal epoxy-coated oven-tempered structure, with an optional polypropylene construction suitable for working with harsh chemicals
- Frontal tempered glass window, sliding horizontally on tracks
- Air suction from both the top and back panel
- Fluorescent LED lighting at 600–800 LUX, with optional rupture protection
- Airflow velocity of 0.5 meter per second
- Side walls coated with 6 mm HPL for durability and easy cleaning, with options for polypropylene/stainless steel
- Epoxy work surface with edges sloping towards the workspace, with options for HPL/stainless steel/polypropylene/ceramic
- Control panel including an on/off unit power and light switch, with an optional VAV system
- Bottom cabinet for chemical storage, with an optional metal or polypropylene hood cabinet



Models

Spec/Model	FH-120-A	FH-150-A	FH-180-A
External Dimensions	1200 x 800 x 2350 mm	1500 x 800 x 2350 mm	1800 x 800 X 2350 mm
W x D x H	47.3x 31.5 x 92.50"	59.0 x 31.5 x 92.5"	70.9 x 31.5 x 92.5"
Workspace	950 x 700 x 800 mm	1250 x 700 x 800 mm	1550 x 700 x 800 mm
(W x D x H)	37.4x 27.6 x 31.5"	49.2x 27.6x 31.5"	61 x 27.6 x 31.5"
Production / test Standard	EN-14175 / ASHRAE 110-1995		
Air Velocity	0.6±0.1m/s, 120 ±20FPM		
Cabinet Material	Inner coating – 6 mm HPL Cold rolled steel, powder coated surface Static		
Work Table Material	HPL/ Ceramic / Epoxy / PP		
Optional Control System	VAV System with 7" color touch screen		
Standard Options	Water tap/ gas tap / vacuum tap/ pp sink, triplex glass, Ex proof light		
Power Supply Options	110 / 220V 50/60 Hz, Single/Triple Phase		
Illumination	>800 LUX		

Accessories

Spec/Model	FH-120-A	FH-150-A	FH-180-A
Stand	1200 x 800 x 800 mm	1500 x 800 x 800 mm	1800 x 800 x 800 mm
W x D x H	47.2 x 31.5 x 31.5"	59 x 31.5 x 31.5"	70.9 x 31.5 x 31.5"
PP Cap Sink	FH-PP-SINK		
Water Tap	FH-W-TAP		
Electrical Socket	FH-SOCKET		
Gas Tap	FH-G-TAP		
1.1 kw fan	FH-FAN-1.1		

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
 Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
 Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA
 European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way,
 Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Metal Horizontal Laminar Clean Bench

TopAir provides high quality, secure Horizontal Laminar Clean Benches. TopAir's clean benches suck air from the room or hall space, transfer the air through a HEPA filter using a fan, and then clean the bench area with filtered air.

In Horizontal Benches, the filtered air flows through a filter installed at the back of the bench, toward the staff.

All components are manufactured by leading global companies, such as EBM Germany and AAF USA.

The products comply with relevant international standards and are customized to the specifications of each client.

Clean benches are designed to supply a clean controlled work environment meeting Class 100/ISO5 cleanliness standard, resembling a clean room, with the additional advantages of portability and small dimensions.

Clean benches provide a high quality alternative to a clean room at a much lower cost and without massive construction.

- Horizontal air stream producing clean air in compliance with ISO5/ CLASS100 or ISO4/Class10 standards (depending on the filter installed).
- Massive epoxy coated, oven-tempered metal structure assures stability, preventing movement during sensitive operations.
- User-friendly digital control system manages fan speed and lighting system; optional alert for filter blockage.
- Work surface made of 304 stainless steel that does not emit particles
- Side windows made from tempered glass, allowing an optimal view of work inside the station
- High quality, quiet fan by EBM Germany; the fan enclosure is padded with noise-absorbing material
- Noise level < 58 DBA
- Universal electrical outlet
- Innovative, advanced design
- Variety of sizes and materials
- Eco-friendly, cost-effective LED lighting



Models

Spec/Model	HC-H90	HC-H120	HC-H160	HC-H180
Outer Dimensions	980 x 750 x 1110 mm	1280 x 750 x 1110 mm	1680 x 750 x 1110 mm	1880 x 750 x 1110 mm
W x D x H	38.6 x 31.5 x 43.7"	50.4" x 31.5 x 43.7"	66.1 x 31.5 x 43.7"	74 x 31.5 x 43.7"
Workspace	900 x 600 x 660 mm	1200 x 600 x 660 mm	1600 x 600 x 660 mm	1800 x 600 x 660 mm
(W x D x H)	35.4 x 23.6 x 26"	47.2 x 23.6 x 26"	63 x 23.6 x 26"	70.9 x 23.6 x 26"
Production / Test Standard	USA Federal Standard 209E / ISO 1- 144641			
Air Velocity m/s	Average 0.45±20% m/s 90±20% FPM			
Cleanliness within Workstation	Class-100 (FS 209E) ISO 5, 14644-1			
Cabinet Material	High grade cold rolled steel and surface is static powder coated			
Work Table Material	Stainless steel SUS 304			
Noise	<58dB	<58dB	<60dB	<62dB
	(Tested 20 cm from the work table, 1.2m above ground)			
Power Supply Options	110 / 220V 50/60 Hz, Single phase			
Illumination	>800 LUX/ 1700 LUX, Cost-effective Eco friendly LEDs			
Filter	HEPA Filter Efficiency of 99,9995% at 0.3 Microns			

Accessories

Spec/Model	HC-H90	HC-H120	HC-H160	HC-H180-ST
Stand	HC-H90-ST	HC-H120-ST	HC-H160-ST	HC-H180-ST
WxDxH				
UV light	HC-H90-UV	HC-H120-UV	HC-H160-UV	HC-H180-UV
Separate Table	HC-H90-VB	HC-H120-VB	HC-H160-VB	HC-H180-VB

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
 Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
 Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA

European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way,
 Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Polypropylene Horizontal Laminar Clean Bench

TopAir provides high quality, secure Horizontal Laminar Clean Benches. TopAir's clean benches suck air from the room or hall space, transfer the air through a HEPA filter using a fan, and then clean the bench area with filtered air.

In Horizontal Benches, the filtered air flows through a filter installed at the back of the bench, toward the staff.


All components are manufactured by leading global companies, such as EBM Germany and AAF USA.

The products comply with relevant international standards and are customized to the specifications of each client.

Clean benches are designed to supply a clean controlled work environment meeting Class 100/ISO5 cleanliness standard, resembling a clean room, with the additional advantages of portability and small dimensions.

Clean benches provide a high quality alternative to a clean room at a much lower cost and without massive construction.

- Horizontal air stream producing clean air in compliance with ISO5/ CLASS100 or ISO4/Class10 standards (depending on the filter installed).
- Polypropylene structure assures stability, preventing movement during sensitive operations.
- User-friendly digital control system manages fan speed and lighting system; optional alert for filter blockage.
- Work surface made of 304 stainless steel that does not emit particles
- Side windows made from tempered glass, allowing an optimal view of work inside the station
- High quality, quiet fan by EBM Germany; the fan enclosure is padded with noise-absorbing material
- Noise level < 58 DBA
- Universal electrical outlet
- Innovative, advanced design
- Variety of sizes and materials
- Eco-friendly, cost-effective LED lighting

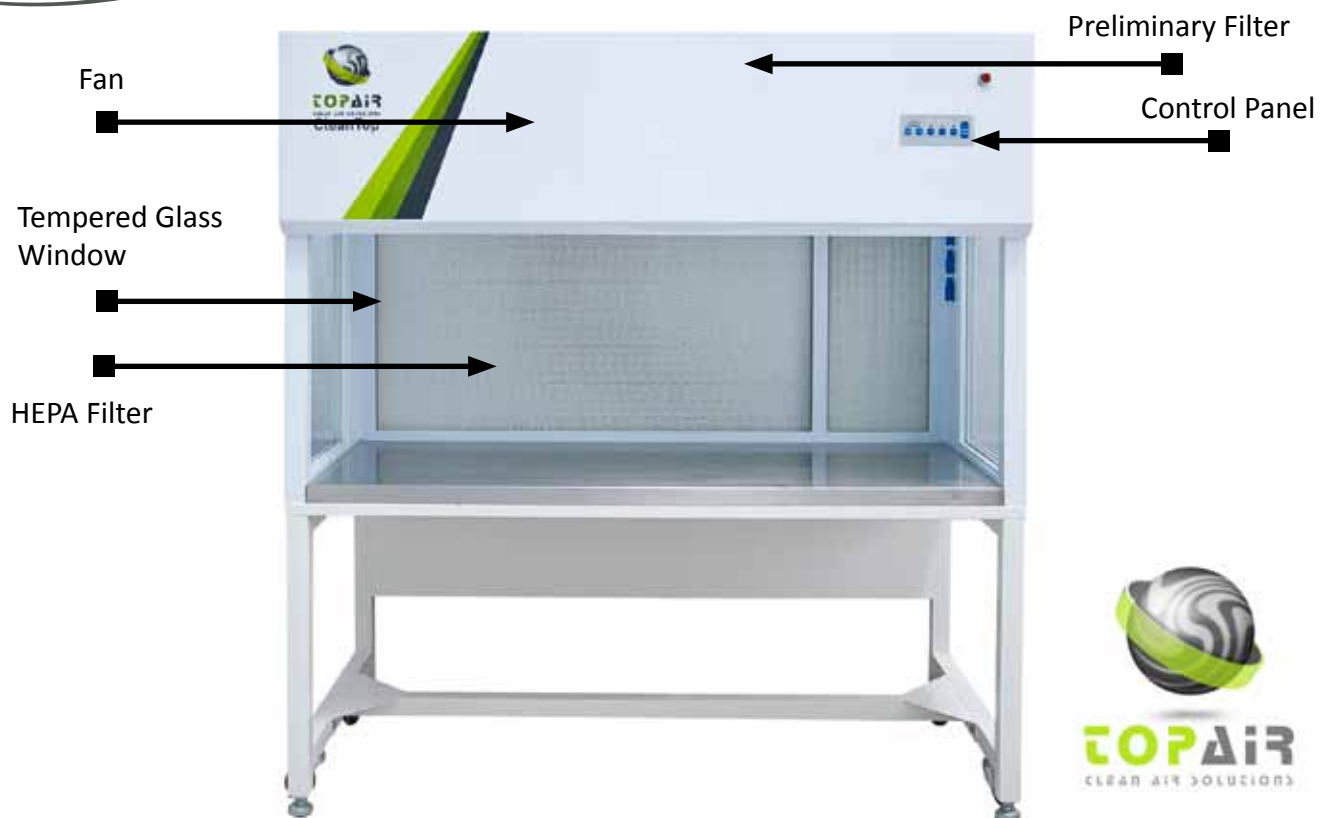

Models

Spec/Model	HC-H90P	HC-H120P	HC-H160P	HC-H180P
Outer Dimensions	980 x 750 x 1110 mm	1280 x 750 x 1110 mm	1680 x 750 x 1110 mm	1880 x 750 x 1110 mm
W x D x H	38.6 x 31.5 x 43.7"	50.4" x 31.5 x 43.7"	66.1 x 31.5 x 43.7"	74 x 31.5 x 43.7"
Workspace	900 x 600 x 660 mm	1200 x 600 x 660 mm	1600 x 600 x 660 mm	1800 x 600 x 660 mm
(W x D x H)	35.4 x 23.6 x 26"	47.2 x 23.6 x 26"	63 x 23.6 x 26"	70.9 x 23.6 x 26"
Production / Test Standard	USA Federal Standard 209E / ISO 1- 144641			
Air Velocity m/s	Average 0.45±20% m/s 90±20% FPM			
Cleanliness within Workstation	Class-100 (FS 209E) ISO 5, 14644-1			
Cabinet Material	Polypropylene			
Work Table Matrial	Stainless steel SUS 304			
Noise	<58dB	<58dB	<60dB	<62dB
	(Tested 20 cm from the work table, 1.2m above ground)			
Power Supply Options	110 / 220V 50/60 Hz, Single phase			
Illumination	>800 LUX/ 1700 LUX, Cost-effective Eco friendly LEDs			
Filter	HEPA Filter Efficiency of 99,9995% at 0.3 Microns			

Accessories

Spec/Model	HC-H90P	HC-H120P	HC-H160P	HC-H180P
Stand	HC-H90-ST	HC-H120-ST	HC-H160-ST	HC-H180-ST
WxDxH				
UV light	HC-H90-UV	HC-H120-UV	HC-H160-UV	HC-H180-UV
Separate Table	HC-H90-VB	HC-H120-VB	HC-H160-VB	HC-H180-VB

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304

Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA

Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA

European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way, Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Metal Vertical Laminar Clean Bench

TopAir provides high quality, secure Vertical Laminar Clean Benches. TopAir's clean benches suck air from the room or hall space, transfer the air through a HEPA filter using a fan, and then clean the bench area with filtered air.

In Vertical Benches, the filtered air is channeled downwards through a filter installed at the top of the bench.


All components are manufactured by leading global companies, such as EBM Germany and AAF USA.

The products comply with relevant international standards and are customized to the specifications of each client.

Clean benches are designed to supply a clean controlled work environment meeting Class 100/ISO5 cleanliness standard, resembling a clean room, with the additional advantages of portability and small dimensions.

Clean benches provide a high quality alternative to a clean room at a much lower cost and without massive construction.

- Vertical air stream producing clean air at ISO5/ CLASS100 or ISO4/Class10 standards
- Massive epoxy-coated and oven tempered metal structure assures stability, preventing bench movements throughout sensitive operations.
- User-friendly digital control system manages fan speed and lighting system operation; optional alert for filter blockage.
- Work surface made of 304 stainless steel which does not emit particles
- Side windows made of tempered glass, allowing an optimal view of work inside the station
- High quality, quiet fan from EBM Germany; the fan enclosure is padded with noise-absorbing material
- Noise level < 58 DBA
- Universal electrical outlet
- Innovative, advanced design
- Variety of sizes and materials
- Eco-friendly, cost-effective LED lighting

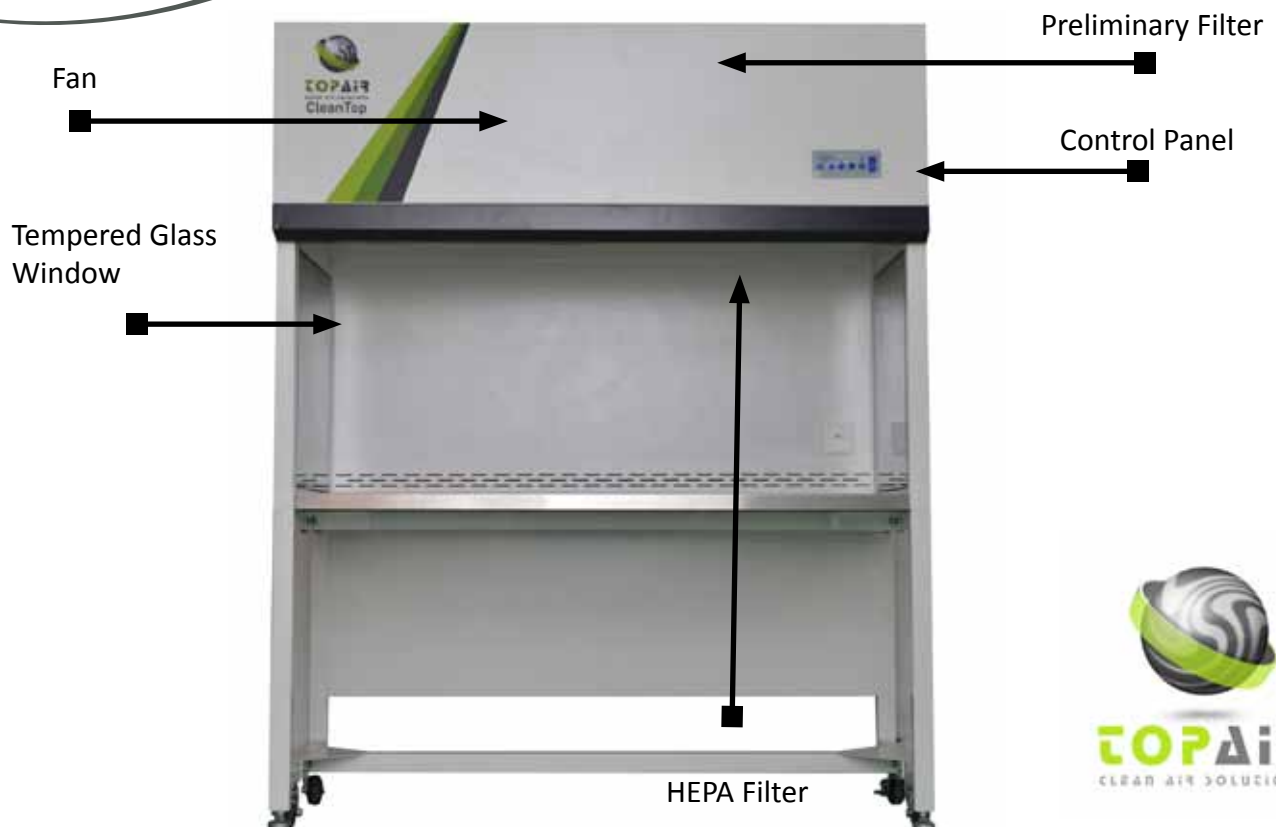

Models

Spec/Model	HC-V90	HC-V120	HC-V150	HC-V180
Outer Dimensions	980 x 750 x 1110 mm	1280 x 750 x 1110 mm	1580 x 750 x 1110 mm	1880 x 750 x 1110 mm
W x D x H	38.6 x 29.5 x 43.7"	50.4 x 29.5 x 43.7"	62.2 x 29.5 x 43.7"	74 x 29.5 x 43.7"
Workspace	900 x 660 x 660 mm	1200 x 660 x 660 mm	1500 x 660 x 660 mm	1800 x 660 x 660 mm
(W x D x H)	35.4 x 26 x 26"	47.2 x 26 x 26"	59 x 26 x 26"	70.9 x 26 x 26"
Production / test Standard	USA Federal Standard 209E / ISO 1- 144641			
Air Velocity m/s	Average 0.45±20% m/s 90±20% FPM			
Cleanliness in Workstation	ISO 5 / Class 100			
Cabinet Material	High grade cold rolled steel and surface is static powder coated			
Work Table Material	Stainless steel SUS 304			
Noise	<58dB	<58dB	<60dB	<62dB
Test Location	(Tested 20 cm from the work table, 1.2m above ground)			
Power Supply Options	110 / 220V 50/60 Hz, Single phase			
Illumination	>800 LUX			
Filter	HEPA Filter Efficiency of 99,9995% at 0.3 Microns			

Accessories

Spec/Model	HC-V90	HC-V120	HC-V160	HC-V180
Stand WxDxH	HC-V90-ST	HC-V120-ST	HC-V160-ST	HC-V180-ST
UV Light	HC-V90-UV	HC-V120-UV	HC-V160-UV	HC-V180-UV
Separate Table	HC-V90-VB	HC-V120-VB	HC-V160-VB	HC-V180-VB

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304

Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA

Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA

European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way, Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Polypropylene Vertical Laminar Clean Bench

TopAir provides high quality, secure Vertical Laminar Clean Benches. TopAir's clean benches suck air from the room or hall space, transfer the air through a HEPA filter using a fan, and then clean the bench area with filtered air.

In Vertical Benches, the filtered air is channeled downwards through a filter installed at the top of the bench.

All components are manufactured by leading global companies, such as EBM Germany and AAF USA.

The products comply with relevant international standards and are customized to the specifications of each client.

Clean benches are designed to supply a clean controlled work environment meeting Class 100/ISO5 cleanliness standard, resembling a clean room, with the additional advantages of portability and small dimensions.

Clean benches provide a high quality alternative to a clean room at a much lower cost and without massive construction.

- Vertical air stream producing clean air at ISO5/CLASS100 or ISO4/Class10 standards
- Polypropylene structure assures stability, preventing bench movements throughout sensitive operations.
- User-friendly digital control system manages fan speed and lighting system operation; optional alert for filter blockage.
- Work surface made of 304 stainless steel which does not emit particles
- Side windows made of tempered glass, allowing an optimal view of work inside the station
- High quality, quiet fan from EBM Germany; the fan enclosure is padded with noise-absorbing material
- Noise level < 58 DBA
- Universal electrical outlet
- Innovative, advanced design
- Variety of sizes and materials
- Eco-friendly, cost-effective LED lighting

Models

Spec/Model	HC-V90P	HC-V120P	HC-V150P	HC-V180P
Outer Dimensions	980 x 750 x 1110 mm	1280 x 750 x 1110 mm	1580 x 750 x 1110 mm	1880 x 750 x 1110 mm
W x D x H	38.6 x 29.5 x 43.7"	50.4 x 29.5 x 43.7"	62.2 x 29.5 x 43.7"	74 x 29.5 x 43.7"
Workspace	900 x 660 x 660 mm	1200 x 660 x 660 mm	1500 x 660 x 660 mm	1800 x 660 x 660 mm
(W x D x H)	35.4 x 26 x 26"	47.2 x 26 x 26"	59 x 26 x 26"	70.9 x 26 x 26"
Production / test Standard	USA Federal Standard 209E / ISO 1- 144641			
Air Velocity m/s	Average 0.45±20% m/s 90±20% FPM			
Cleanliness in Workstation	ISO 5 / Class 100			
Cabinet Material	Polypropylene			
Work Table Material	Stainless steel SUS 304			
Noise	<58dB	<58dB	<60dB	<62dB
Test Location	(Tested 20 cm from the work table, 1.2m above ground)			
Power Supply Options	110 / 220V 50/60 Hz, Single phase			
Illumination	>800 LUX			
Filter	HEPA Filter Efficiency of 99,9995% at 0.3 Microns			

Accessories

Spec/Model	HC-V90P	HC-V120P	HC-V160P	HC-V180P
Stand WxDxH	HC-V90-ST	HC-V120-ST	HC-V160-ST	HC-V180-ST
UV Light	HC-V90-UV	HC-V120-UV	HC-V160-UV	HC-V180-UV
Separate Table	HC-V90-VB	HC-V120-VB	HC-V160-VB	HC-V180-VB

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304

Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA

Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA

European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way, Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Polypropylene UV PCR Cabinet

TopAir's Polypropylene PCR Cabinets offer a quality filtering system which provides complete protection from contamination.

Manufactured from high-quality non-corrosive polypropylene, the cabinets feature a high level of chemical resistance. Polypropylene increases the product's tensile strength and improves its thermal characteristics.

The cabinets are used in the genomics, proteomics, molecular biology and forensic sciences industries.

They feature an ergonomic design and premium materials, including a cutting-edge EBM motor fan ensuring long-term durability and low noise levels.

- Welded white polypropylene structure
- Built-in polypropylene worktop
- Ozone free UV lightbulb, UV output at 1M 254nm
- Tempered glass frameless pivot window
- Eco-friendly, cost-effective 600-800 LUX LED lighting
- Wind speed at 0.6+0.1 m/s, 120±FPM
- Smart safety mechanism prevents UV exposure
- Top filtration unit including HEPA filter
- User-friendly control panel including fan, UV and lighting control as well as UV timer (30 min).



Models

Spec/Model	PCR-060-HEPA	PCR-060-UV
External Dimensions W x D x H	600 x 500 x 700 mm 27.5 x 19.7 x 27.5"	600 x 500 x 550 mm 23.6x 19.7 x 21.6"
Workspace (W x D x H)	580 x 480 x 500 mm 22.8 x 18.9 x 19.7	580 x 480 x 500 mm 22.8 x 18.9 x 19.7
Production / test Standard	CE	
Air Velocity	0.6±0.1m/s, 120 ±20 FPM	
Cabinet Material	White Polypropylene	
Work Table Material	White Polypropylene	
Noise	< 52 dB	
UV light	17w ozone free 245nm	
Power Supply Options	110 / 220V 50/60 Hz, Single phase	
Illumination	> 800 LUX / 1700 lux	
Filter	H14, HEPA	---

Accessories

Spec/Model	PCR-060-HEPA	PCR-060-UV
Stand	PCR-060-ST	PCR-060-ST
W x H x D	660 x 500 x 802 mm 26 x 19.7 x 31.5 "	660 x 500 x 802 mm 26 x 19.7 x 31.5 "

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
 Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
 Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA
 European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way,
 Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Polypropylene Biosafety Cabinet

TopAir's Class II Biological Safety Cabinets protect staff, the environment, and sensitive work processes in which biological agents are applied, typically in the biological and microbiological industries.


The product offers a high level of contamination protection, based on two advanced HEPA filters operating at a typical efficiency of 99.9995% @ 0.3 um.

The polypropylene structure offers an optimal solution as a solid, easily-cleaned, high resistance material.

The cabinet is equipped with a smart, safe and elegant touch-screen control system that protects the worker and provides alerts on periodic maintenance actions and devices replacement.

All components are low energy consumption, with LED lighting and EC fan motor. The system also has programmable "green" night mode, that shuts off all unnecessary electricity consumers and sets the vital components at the required safety level.

- Polypropylene structure
- 6 mm tempered glass side walls
- 304 stainless steel work surface and spill tray
- Two H14 HEPA filters
- Advanced EC fan with 304 stainless steel housing
- 55 dba noise level
- ISO 5/ CLASS 100 cleanliness level
- Smart, programmable advanced touch screen control system
- Technician calibration screen
- Maintenance alarms
- Technical faults alarms
- Timers and counters management screen
- Germicidal water proof UV light system and safety interlock mechanism
- 6 mm double layer safety front glass with electrical motion system
- Programmable economical night mode
- Economical LED light

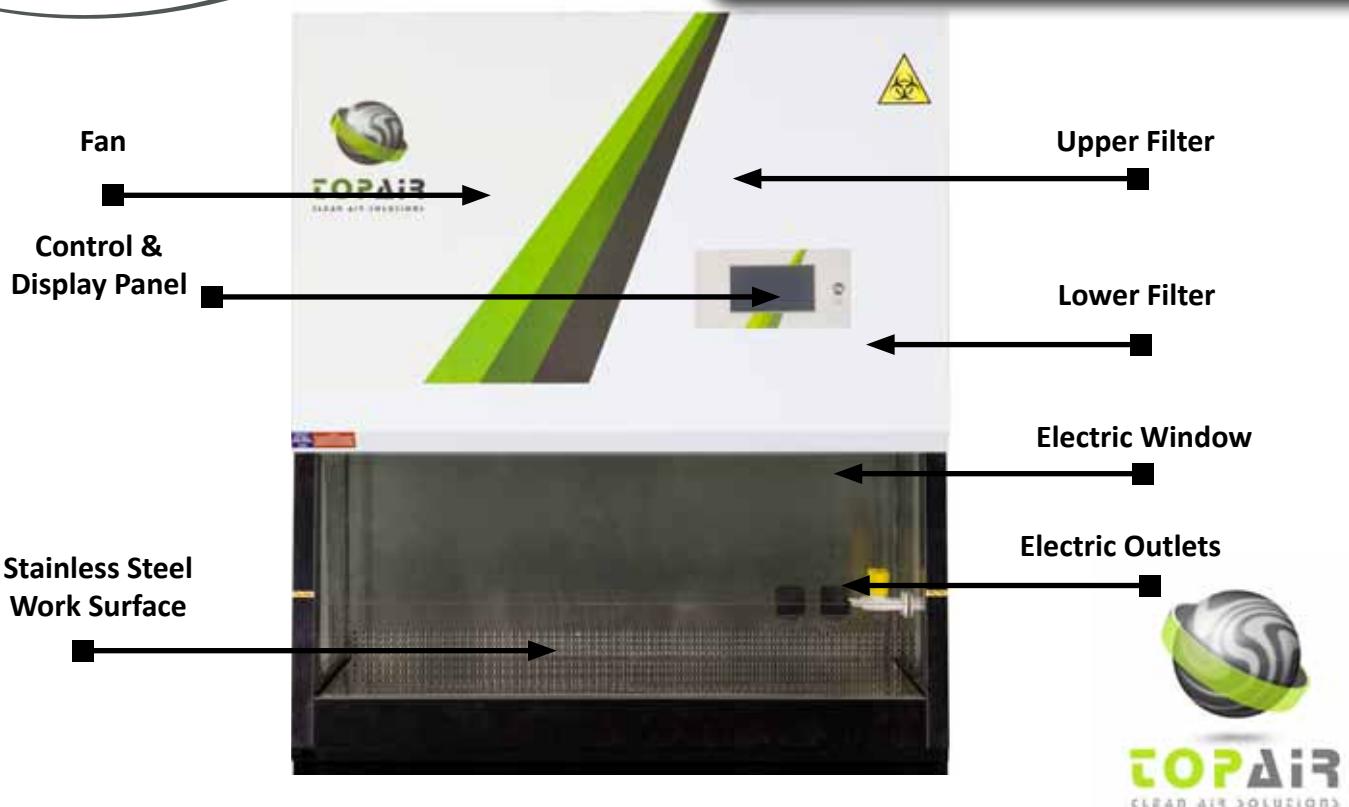

Models

Spec/ Model	BO-090PP	BO-120PP	BO-150PP	BO-180PP
Outer Dimensions W x D x H	900 x 800 x 1300 mm 35.4x 31.5 x 51.2"	1200 x 800 x 1300 mm 47.2 x 31.5 x 51.2"	1500 x 800 x 1300 mm 59 x 31.5 x 51.2"	1800 x 600 x 1300 mm 70.9 x 31.5 x 51.2"
Workspace (W x D x H)	850 x 650 x 550 mm 33.46 x 25.6 x 21.65"	1150 x 650 x 550 mm 45.27 x 25.6 x 21.65"	1450 x 650 x 550 mm 57 x 25.6 x 21.65"	1750 x 650 x 550 mm 68.9 x 25.6 x 21.65"
Production/ Test Standard	CE /EN12469			
Downflow Velocity	0.45 m/s, 90 Fpm			
Inflow velocity	0.5 m/s, 100 fpm			
Cleanliness level	Class 100/ISO 5			
Cabinet Material	Welded white polypropylene structure with stainless still 304 worktop			
Noise Level	<52dB	<52dB	<54dB	<60dB
	(Tested 20 cm from worktable, 1.2m above ground)			
	115 / 230V 50/60 Hz, Single phase			
Illumination	>600-800 LUX, Eco-friendly LED lighting			
Filters	HEPA/ULPA			

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
 Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
 Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA
 European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way,
 Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Downflow Unit

TopAir's Downflow Workstation is a standalone, ductless unit that prevents the exposure of lab staff to harmful powders or fumes.


The Downflow Workstation features an open structure which enables close inspection of various lab materials, and still provides a high level of protection.

Particles or fumes flow downward through the stainless steel work surface and contaminants are removed using several filters.

Following the filtering of fumes or particulates, clean air flows back into the room.

- Electrical - 110/220v 60/50hz
- Light - 18w LED
- Worktop - 304 SUS
- Structure - Polypropylene
- Filters - H14 HEPA/ carbon
- Fans - Ebm 310 centrifugal
- Alarm - High pressure (filter block)



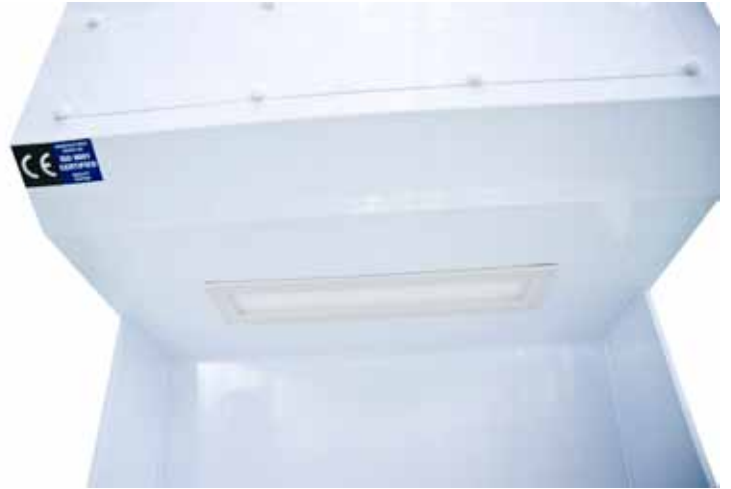

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA
European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way,
Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Metal Lab Storage Cabinet

TopAir's high quality lab storage cabinet combines an ergonomic design and premium materials.


The cabinet is manufactured from cold rolled steel with a static powder coated structure.

The cabinet complies with international standards, protecting lab staff from inhaling harmful chemicals and providing convenient solution, bottle and can storage.

Cabinet configuration options

- Lab Storage Cabinet with fuming duct connection - can be connected to an existing fuming system.
- Lab Storage Cabinet with built-in fan & fuming duct connection - an independent unit that can channels the airflow outside the building using flexible ducting.
- Lab Storage Cabinet with fan & filter system - an independent unit that provides fuming for the cabinet interior with no need for ducting/pipes

- Cold rolled steel, static powder coated structure
- Four observation windows from hermetically tempered glass
- Four doors with locks
- Ventilation openings at the sides and top of the cabinet
- Three stationary shelves inside the cabinet
- Two compartments
- Optional suction fan

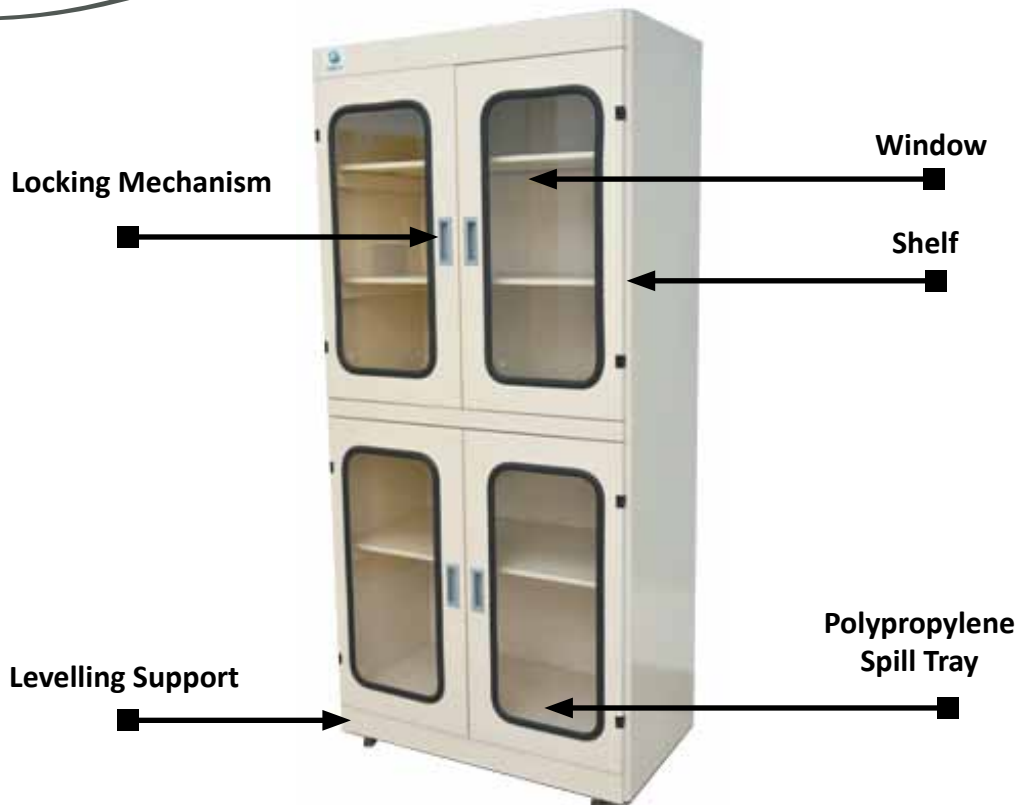

Models

Spec/Model	LFC-PF-900	LFC-PF-1200	LFC-AFF-900	LFC-AFF-1200
Description	Lab storage cabinet with duct fuming connection	Lab storage cabinet with duct fuming connection	Lab storage cabinet with independent fume filtering systems	Lab storage cabinet with independent fume filtering systems
External Dimensions (W x D x H)	900 x 450 x 1800 mm 35.43 x 26.97 x 70.9"	1200 x 450 x 1800 mm 47.2 x 26.97 x 70.9"	900 x 450 x 2100 mm 35.43 x 26.97 x 82.7"	1200 x 450 x 2100 mm 47.2 x 26.97 x 82.7"
Cabinet Material	Cold rolled steel; static power coated surface 6 mm Tempered Glass			
Power Supply Options	110/220V 50/60 Hz	110/220V 50/60 Hz	--	
Filter	Charcoal Filter / HEPA Filter	Charcoal Filter / HEPA Filter	--	

Accessories

LFC-SPT	LFC-FXP-10	LFC-SDT-1010
Polypropylene spill tray	Flexible 10 cm dim pipe	Solid PVC 10x10 cm duct

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
 Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
 Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA
 European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way, Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Polypropylene Lab Storage Cabinet

TopAir's high quality lab storage cabinet combines an ergonomic design and premium materials.

The cabinet is manufactured from white polypropylene featuring a high level of corrosive resistance.

The cabinet complies with international standards, protecting lab staff from inhaling harmful chemicals and providing convenient solution, bottle and can storage.

Cabinet configuration options

- Lab Storage Cabinet with fuming duct connection - can be connected to an existing fuming system.
- Lab Storage Cabinet with built-in fan & fuming duct connection - an independent unit that can channels the airflow outside the building using flexible ducting.
- Lab Storage Cabinet with fan & filter system - an independent unit that provides fuming for the cabinet interior with no need for ducting/pipes

- Polypropylene structure featuring high corrosive resistance
- Four observation windows from hermetically tempered glass
- Four doors with locks
- Ventilation openings at the sides and top of the cabinet
- Three stationary shelves inside the cabinet
- Two compartments
- Optional suction fan



Models

Spec/Model	LFC-PF-900-PP	LFC-PF-1200-PP	LFC-AFF-900-PP	LFC-AFF-1200-PP	LFC-AFF-1600-PP
Description	Lab storage cabinet with duct fuming connection	Lab storage cabinet with duct fuming connection	Lab storage cabinet with independent fume filtering systems	Lab storage cabinet with independent fume filtering systems	Lab storage cabinet with independent fume filtering systems
External Dimensions (W x D x H)	900 x 450 x 2100 mm 35.43 x 26.97 x 82.7"	1200 x 450 x 2100 mm 47.2 x 26.97 x 82.7"	900 x 450 x 2100 mm 35.43 x 26.97 x 82.7"	1200 x 450 x 2100 mm 47.2 x 26.97 x 82.7"	1600 x 450 x 2100 mm 63 x 26.97 x 82.7"
Cabinet Material	White polypropylene, 6 mm Tempered Glass				
Power Supply Options			110/220V 50/60 Hz		
Filter			Charcoal Filter / HEPA Filter		

Accessories

LFC-SPT	LFC-FXP-10	LFC-SDT-1010
Polypropylene spill tray	Flexible 10 cm dim pipe	Solid PVC 10x10 cm duct

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
 Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
 Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA
 European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way,
 Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Outdoor Centrifugal Fans & VAV Systems

Outdoor Centrifugal Fans

TopAir provides high-quality outdoor centrifugal fans. The roof/side wall fans are weather resistant, based on a PVC structure and polypropylene impeller.

A 3-phase motor with water protection level of IP 44/55, operates at 380 VAC.

TopAir's variety of sizes, flows and accessories allows choosing the exact fan suitable for the client's needs.

VAV (Variable Air Volume) System for Fume Cupboards

TopAir provides an advanced reliable VAV (Variable Air Volume) system for fume cupboards.

The unit measures the sash line air velocity using a high quality hot wire sensor. The data then converts to a 0-10 VDC (Voltage to Frequency Converter) signal that can control a VFD (Variable-Frequency Drive) or electrical damper.

The system's key advantage is its ease of operation: an unskilled worker can easily calibrate, set the alarm and operation set points and control the system.

The VAV system includes a 7" color touch screen, provides a safe, energy-saving environment and can upgrade fume cupboards to smart, advanced devices.



Fan Models

Fan Model	RPM	Pressure (PA)	M3/H	Power	Structure	Impeller	Power Supply	Water Resistance	Sound Level	Weight
FH-FAN-1.1	1450	510	1400	1.1.KW	PVC	PP Dia 400 mm W-155 mm	3 Phase 380V	IP 44/65	70 dBA	26 kg
		500	1600							
		490	1800							
		470	2000							
		440	2200							
		420	2400							
		380	2400							
		340	2600							
		300	2800							

Fan Model	RPM	Pressure (PA)	M3/H	Power	Structure	Impeller	Power Supply	Water Resistance	Sound Level	Weight
FH-FAN-1.5	1450	510	1739	1.5.KW	PVC	PP Dia 400 mm W-155 mm	3 Phase 380V	IP 44/65	70 dBA	28 kg
		500	1911							
		490	2126							
		470	2315							
		440	2513							
		420	2703							
		380	2895							
		340	3085							
		300	3285							

Fan Model	RPM	Pressure (PA)	M3/H	Power	Structure	Impeller	Power Supply	Water Resistance	Sound Level	Weight
FH-FAN-2.2	1450	510	2000	2.2.KW	PVC	PP Dia 480 mm W-200 mm	3 Phase 380V	IP 44/65	74 dBA	34 kg
		500	2200							
		490	2400							
		470	2600							
		440	2800							
		420	3000							
		380	3200							
		340	3400							
		300	3600							

Fan Accessories

P/N	FH-M-DAM	FH-EXM	FH-WRACK
Description	Fan Manual Damper	Explosion Proof Fan Motor	Metal Fan Wall Rack

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304

Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA

Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA

European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way, Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Electromechanical Motor For Fans

The three-phase asynchronous motor is a basic motor with a frame range of 80-315.




The motor features high efficiency, power savings, exceptional operation performance, low vibration levels, low noise levels, long service life, high reliability, convenient maintenance and large breakaway torque. Fixing measurements and power grade comply with IEC standard.

- Rated voltage: 380V/660V or custom voltage
- Rated frequency: 50Hz or 60Hz
- Connection: Star connection for 3Kw or less, delta connection for 4KW or more
- Duty/rating: Continuous (S1)
- Insulation class: B class
- Protection class: IP44
- Cooling method: IC411 (cooled by self fan)
- **Operating conditions:**
 - Ambient temperature: -15°C to 40°C
 - Altitude: Up to 1000 meters above sea level
 - Relative humidity: lower than 90%



Specifications

Type	Power Rated	Amps A	Speed r/min	EFF η (%)	Power Factor $\cos \phi$	Tst/Tn	Ist/In	Mst/Tn	Noise
Y-90L-4	1.5	3.72	1400	78.5	0.78	2.3	6.0	2.3	61
Y-100L1-4	2.2	5.09	1420	80	0.51	2.3	7.0	2.3	64

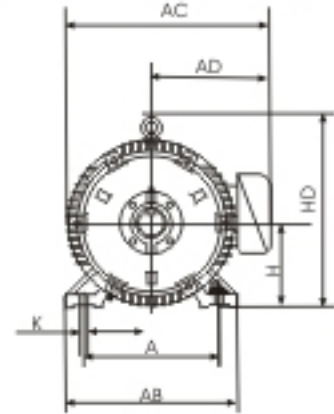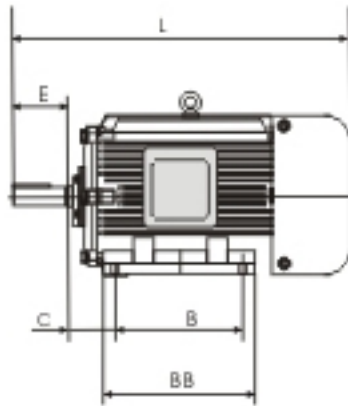

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
 Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
 Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA
 European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way, Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

LCD Touch Screen Control System

Topair's smart touch color 4.3" screen control systems are manufactured and programmed to provide the utmost safety, user-friendly operation and advanced environment.

The system can control biological safety cabinets, laminar clean benches and ductless/ducted fume hoods.


The heart of the controller is a 4.3 inch TFT LCD, 65536 colors HMI touch screen.

It provides alarms and reminders for dangerous situations such as low air velocity or sash modes which are too high, as well as periodic maintenance treatments such as filter replacement date, UV light replacement, annual tests and more.

The system includes a built in calibration screen that offers easy in-house calibration by the operator without the dependence of manufacturer technicians.

Green System

The control unit is built to operate EC fans, thus saving substantial energy. It also has a built-in settable "night mode" that can be programmed to reduce energy consumption by automatically turning off the lights and operating the fan at the minimum safety level.

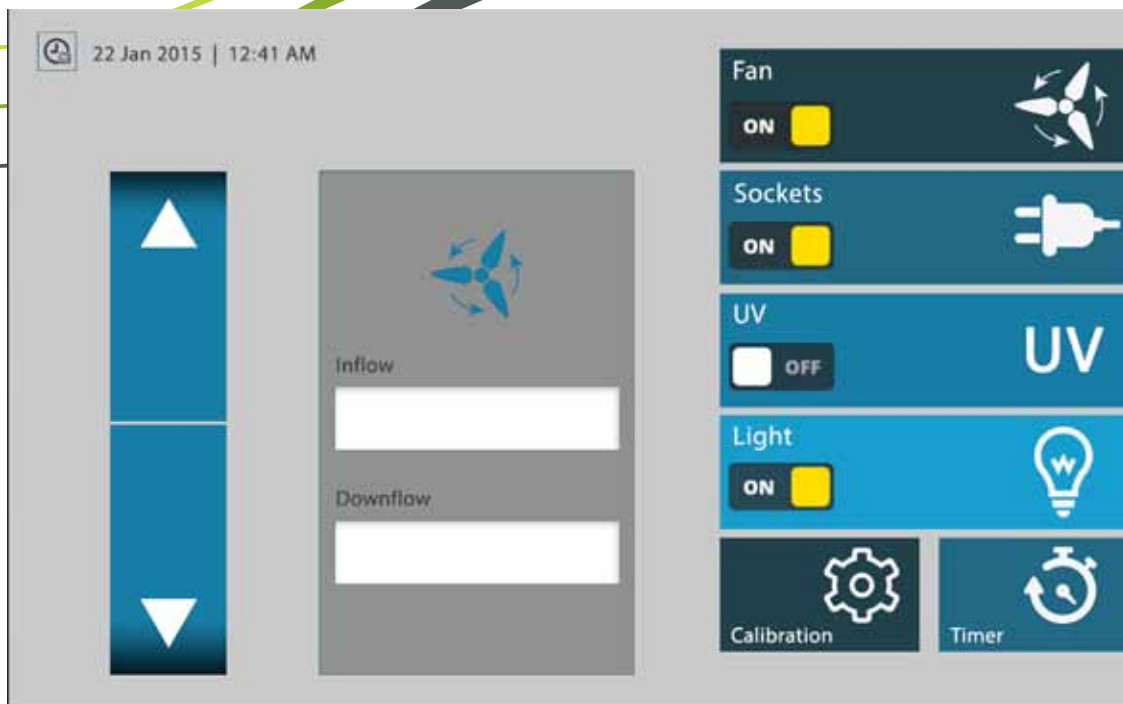

Models

Part	Catalog No.	Description
Basic touch control system	HMP-32	<p>Basic 4.3 inch TFT LCD, 65536 color touch screen control system includes a real time clock and timer screen.</p> <p>The basic pack can control a variety of products and has an option for expansion of analog output and input devices.</p>
VAV system	HMP-32-VAV	<p>An extension of the basic pack. Air velocity control that includes easy operating calibration screen, settable operating speed and settable alarm speed + visual and audio alarm. This option provides three main advantages:</p> <ol style="list-style-type: none"> Energy saving. Low noise operation. Safety at work.
Gas detector system	HMP-32-GASD	<p>Electronic gas detector system with a variety of high quality gas sensors.</p> <p>The system has a sensitivity tuning option and provides visual and audio alarms when the gas concentration passes the set point.</p> <p>This option has two main advantages:</p> <ol style="list-style-type: none"> It reduces the chances of working in a dangerous environment. It can save unnecessary filter replacements that usually take place periodically.
Program development	HMP-DEV	<p>Customized programming and interface for the control system.</p> <p>It can include a customer logo or appearance and suit local standards in the target markets.</p>

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
 Email: sales@topairsystems.com Web: www.topairsystems.com










Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
 Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA
 European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way,
 Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Add-On Accessories

Part Number	Description	Photo	Dimensions
HSA-10-2	Gas Tap Mouth		
HSB6-1	Gas Tap Mouth		
HSB6-3	Gas Tap Mouth		
HSA-10	Gas remote control valve		
HSB3-1	Side Wall Gas Tap		
HSA-10B	Water tap remote control		
HSB6-2	Water tap mouth		
HSA-10-2	HSA13-1		

Part Number	Description	Photo	Dimensions
HSA10-3	Water tap mouth		
HSP1-PP	Polypropylene sink		
HSP2-PP	Polypropylene sink		
HSP3-PP	Polypropylene sink		
HSP-4	Polypropylene sink		
HSP4-1	Polypropylene sink		
HSP4-2	Polypropylene sink		
HSP4-3	Polypropylene sink		

Cont. - Add-On Accessories

Part Number	Description	Photo	Dimensions
HSP5-P	Bottle trap		
HSKP-6a	Protection net		
HSP7-2	Polypropylene sink		
HSP7-3	Polypropylene sink		
HSD-2	Polypropylene peg board		
HSD-1B	Stainless steel peg board		
HSD-1	Polypropylene peg board		
36 HSD-2B	Stainless steel peg board		

Metal Cyanoacrylate Fuming Chamber

The Cyanoacrylate Fuming Chamber is used to develop latent prints from non-porous surfaces in a safe, controlled environment.

Cyanoacrylate is placed inside the chamber while evidence is easily positioned using the adjustable hanging rods. Starting the cycle triggers the automated system to control the hotplate, humidity, door lock, internal circulation fan, and purge cycle.

Its recirculatory design enables the system to operate and setup with no ducting required.

The Cyanoacrylate vapors are filtered by a carbon filter. This ensures that no dangerous substances are exhausted in to the atmosphere surrounding the laboratory. Its ductless construction also allows the unit to be easily moved and transported.

- Three sizes - from small benchtop units to larger walk-in chambers.
- Easy to use control displays all parameters of the processing cycle. Adjustments to the presets can be quickly performed.
- Can be activated automatically, or manually with an option for temperature and humidity control.
- Filtering system with a carbon filter.
- Eco-friendly, cost-saving LED lighting.



Models

Spec/Model	SG-060	SG-075	SG-090	SG-150
Airflow (m3/hr)	175	250	250	250
Dimensions WxDxH	600 x 600 x 760 mm 23.6 x 23.6 x 29.9"	850 x 740 x 1550 mm 33.4 x 29.5 x 61"	900 x 750 x 1550 mm 35.4 x 29.5 x 61"	1500 x 750 x 1550 mm 59 x 29.5 x 61"
Noise	<48 dBA	<48 dBA	<48 dBA	<48 dBA
Lighting	LED 18 W	LED 18 W	LED 18 W	LED 18 W
Main Filter (Qty.)	3 kg	5 kg	5 kg	8 kg
Prefilter (Qty.)	1	1	1	1
Electrical Supply	Single Phase, 230v, 50Hz			
Switches	Main ON/OFF			
Monitoring	Electronic Display			
Fan	Low Noise Centrifugal			
Construction	Aluminum Frame Structure, Safety Triplex Glass			
Production/Test Standard	CE			

Programmable Electronic Control

The electronic control system includes easy on-screen functions to program Purge Cycle, Contact Time and RH Sensor.

Filter Type	P/N
Main Filter	SG-CF
Pre Filter	SG-PF

Main and Pre Filters are supplied as standard with all chambers and are listed here for replacement purposes.
 * Prefilters are supplied as standard with all units. Efficiencies are over 99.6%. The filters remove particles from the airstream before it flows through the Main Filter.
 ** Filters must be changed on a regular basis to maintain chamber efficiency.



Operation Process

- Evidence is placed within the chamber and cyanoacrylate is placed on the hotplate
- Door is closed and start button is pressed. Door locks automatically
- Evidence is placed within the chamber
- Humidifier is activated, increases humidity and releases vapors composed of 60%-80% humidity and fumes into the chamber
- Fuming continues for a half-hour cycle
- Once the cycle has completed, the evidence can be examined
- The unit includes full manual operation system

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304

Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA

Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA

European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way, Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Polypropylene Cyanoacrylate Fuming Chamber


The Cyanoacrylate Fuming Chamber is used to develop latent prints from non-porous surfaces in a safe, controlled environment.

Cyanoacrylate is placed inside the chamber while evidence is easily positioned using the adjustable hanging rods. Starting the cycle triggers the automated system to control the hotplate, humidity, door lock, internal circulation fan, and purge cycle.

Its recirculatory design enables the system to operate and setup with no ducting required.

The Cyanoacrylate vapors are filtered by a carbon filter. This ensures that no dangerous substances are exhausted in to the atmosphere surrounding the laboratory. Its ductless construction also allows the unit to be easily moved and transported.

- Three sizes - from small benchtop units to larger walk-in chambers.
- Easy to use control displays all parameters of the processing cycle. Adjustments to the presets can be quickly performed.
- Can be activated automatically, or manually with an option for temperature and humidity control.
- Filtering system with a carbon filter.
- Eco-friendly, cost-saving LED lighting.

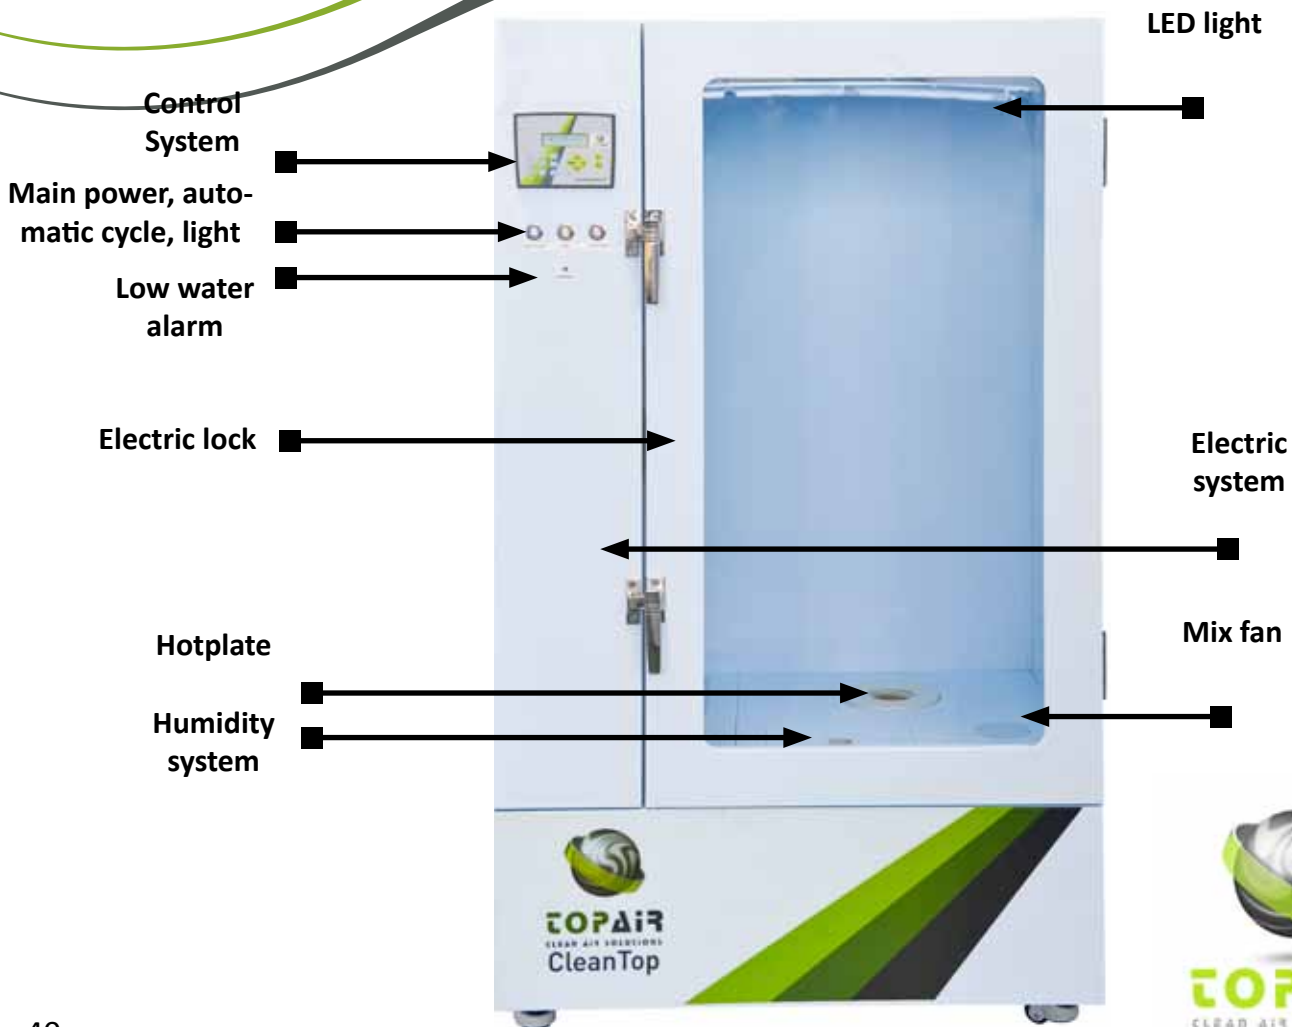

Models

Spec/Model	SG-060-P	SG-075-P	SG-090-P	SG-150-P
Airflow (m3/hr)	175	250	250	250
Dimensions WxDxH	600 x 600 x 760 mm 23.6 x 23.6.2 x 29.9"	850 x 740 x 1550 mm 33.4 x 29.5 x 61"	900 x 750 x 1550 mm 35.4 x 29.5 x 61"	1500 x 750 x 1550 mm 59 x 29.5 x 61"
Noise	<48 dBA	<48 dBA	<48 dBA	<48 dBA
Lighting	LED 18 W	LED 18 W	LED 18 W	LED 18 W
Main Filter (Qty.)	3 kg	5 kg	5 kg	8 kg
Prefilter (Qty.)	1	1	1	1
Electrical Supply	Single Phase, 230v, 50Hz			
Switches	Main ON/OFF			
Monitoring	Electronic Display			
Fan	Low Noise Centrifugal			
Construction	Polypropylene Structure, Safety Triplex Glass			
Production/Test Standard	CE			

Programmable Electronic Control

The electronic control system includes easy on-screen functions to program Purge Cycle, Contact Time and RH Sensor.

Filter Type	P/N
Main Filter	SG-CF
Pre Filter	SG-PF

Main and Pre Filters are supplied as standard with all chambers and are listed here for replacement purposes.

* Prefilters are supplied as standard with all units. Efficiencies are over 99.6%. The filters remove particles from the airstream before it flows through the Main Filter.

** Filters must be changed on a regular basis to maintain chamber efficiency.



Operation Process

- Evidence is placed within the chamber and cyanoacrylate is placed on the hotplate
- Door is closed and start button is pressed. Door locks automatically
- Evidence is placed within the chamber
- Humidifier is activated, increases humidity and releases vapors composed of 60%-80% humidity and fumes into the chamber
- Fuming continues for a half-hour cycle
- Once the cycle has completed, the evidence can be examined
- The unit includes full manual operation system

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304

Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA

Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA

European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way, Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Water Filtration Cyanoacrylate Fuming Chamber

The Water Filtration Cyanoacrylate Fuming Chamber is used to develop latent prints from non-porous surfaces in a safe, controlled environment.

Cyanoacrylate is placed inside the chamber while evidence is easily positioned using the adjustable hanging rods. Starting the cycle triggers the automated system to control the hotplate, humidity, door lock, internal circulation fan, and purge cycle.

The Cyanoacrylate vapors are filtered using water filtration. This ensures that no dangerous substances are exhausted in to the atmosphere surrounding the laboratory.

The reaction of the fumes of Cyanoacrylate to water causes the fumes turn into to non-hazardous plastic residue.

The filtration tank is equipped with a draining tap and washing/ refilling built in pipe. these actions do not require removing the filtration tank for washing and refilling.

The unit's recirculatory design enables the system to operate and setup with no ducting required.

Its ductless construction also allows the unit to be easily moved and transported.

- Easy to use control displays all parameters of the processing cycle.
- Adjustments to the presets can be quickly performed.
- Automatic heating control is determined according to the amount of cyanoacrylate placed in the chamber.
- Automatic temperature control Humidity control ensures $\pm 3\%$ humidity
- Water Filtration
- Eco-friendly, cost-saving LED lighting.



TOPAIR
CLEAN AIR SOLUTIONS

Models

Spec/Model	SG-060-P	SG-075-P	SG-090-P	SG-150-P	SG-180-P
Airflow (m3/hr)	175	250	250	250	250
Dimensions WxDxH	600 x 600 x 760 mm 23.6 x 236.2 x 29.9"	850 x 740 x 1550 mm 33.4 x 29.5 x 61"	900 x 750 x 1550 mm 35.4 x 29.5 x 61"	1500 x 750 x 1550 mm 59 x 29.5 x 61"	850 x 750 x 1400 mm 33 x 29.5 x 55"
Noise	<48 dBA	<48 dBA	<48 dBA	<48 dBA	<48 dBA
Lighting	LED 18 W	LED 18 W	LED 18 W	LED 18 W	LED 18 W
Main Filter (Qty.)	3 kg	5 kg	5 kg	8 kg	Water Trap
Prefilter (Qty.)	1	1	1	1	--
Temp & Humidity Accuracy	--	--	--	--	± 3%
Temperature	--	--	--	--	± 2°C
Fan	Low Noise Centrifugal				--
Electrical Supply	Single Phase, 230v, 50Hz				
Switches	Main ON/OFF				
Monitoring	Electronic Display				
Construction	Polypropylene Structure, Safety Triplex Glass				
Production/Test Standard	CE				

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
 Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
 Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA
 European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way,
 Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Forensic Evidence Drying Cabinet

TopAir's advanced Forensic Evidence Drying Cabinet protects wet or damp evidence from detrimental factors such as potential cross contamination and airborne pathogens.

The cabinet also creates an effective shield for staff, preventing the officers on duty from being exposed to harmful blood-borne pathogens as well as from offensive odors resulting from decomposition and harmful bacteria or viruses.

The unit's UV light performs additional disinfection of the cabinet's interior between sessions. This prevents cross contamination, and ensures the integrity of samples for the purpose of DNA testing.

The unit is designed to clean the incoming air streams through pre-filtration and then filters the cabinet exhaust air through HEPA filtration.

TopAir can customize the ductless evidence drying cabinets to meet the demands of your facility.

- Polypropylene components & clear triplex safety glass
- Polypropylene internal & external cover
- Cutting edge heating & humidity mechanism, 34c, 30% RH
- Double location HEPA filter – supply and exhaust.
- Temp controller
- Outside RH & inner temp. display
- Top quality purge fan
- Flexible dividing and shelving section
- UV sterilization + safety interlock mechanism
- Bottom draining basin with one way valve



Models

Model	EV-090	EV-090-SD	EV-120	EV-120-SD	EV-180	EV-180-SD
External Dimension W-H-D (mm)	900*1240*850	900*1240*850	1200*1240*850	1200*1240*850	1800*1240*850	1800*1240*850
Internal Dimension W-H-D (mm)	850*1000*600	850*1000*600	1150*1000*600	1150*1000*600	1750*1000*600	1750*1000*600
Inner Capacity (L)	510	510	690	690	1050	1050
Weight	90	98	105	113	135	143
Power Consumption	100w	900w	100w	900w	100w	900w
Super Dry System	n	y	n	y	n	y
Rated Voltage	110/230v 50/60HZ	110/230v 50/60HZ	110/230v 50/60HZ	110/230v 50/60HZ	110/230v 50/60HZ	110/230v 50/60HZ
Material	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
 Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
 Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA
 European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way,
 Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

Certification

TopAir products are fully certified, complying with the most demanding international standards. All products are manufactured under rigorous quality assurance and control regulations, ensuring personnel safety, optimal conditions for sensitive work processes and respect for the environment.

Polypropylene Fume Cupboard

EN-14175 / CE / ASHRAE 110-1995

Metal Fume Cupboard

EN-14175 / ASHRAE 110-1995

Polypropylene Ductless Fume Hood

EN-14175 / CE / ASHRAE 110-1995

Metal Ductless Fume Hood

EN-14175 / CE / ASHRAE 110-1995

Class II Biological Safety Cabinet

NSF 49:2002 (USA) / ANSI (USA)

Polypropylene UV-PCR Cabinet

CE

Laminar Clean Bench – Vertical/ Horizontal Flow

USA Federal Standard 209E, ISO 1- 144641

Cyanoacrylate Fuming Chamber

CE



Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA
European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way,
Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com

TOPAIR CLEAN AIR SOLUTIONS CATALOG



TopAir Systems
Website: www.topairsystems.com
Email: sales@topairsystems.com

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304
Email: sales@topairsystems.com Web: www.topairsystems.com

Mailing Address: TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA
Headquarters - USA: 3182 Monterey Drive, Merrick, NY 11566 USA
European Sales Office: Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way,
Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: sales@topairsystems.com